


# Connection cables for SIKA Vortex flow sensors VVX

Customized cable assemblies for series applications

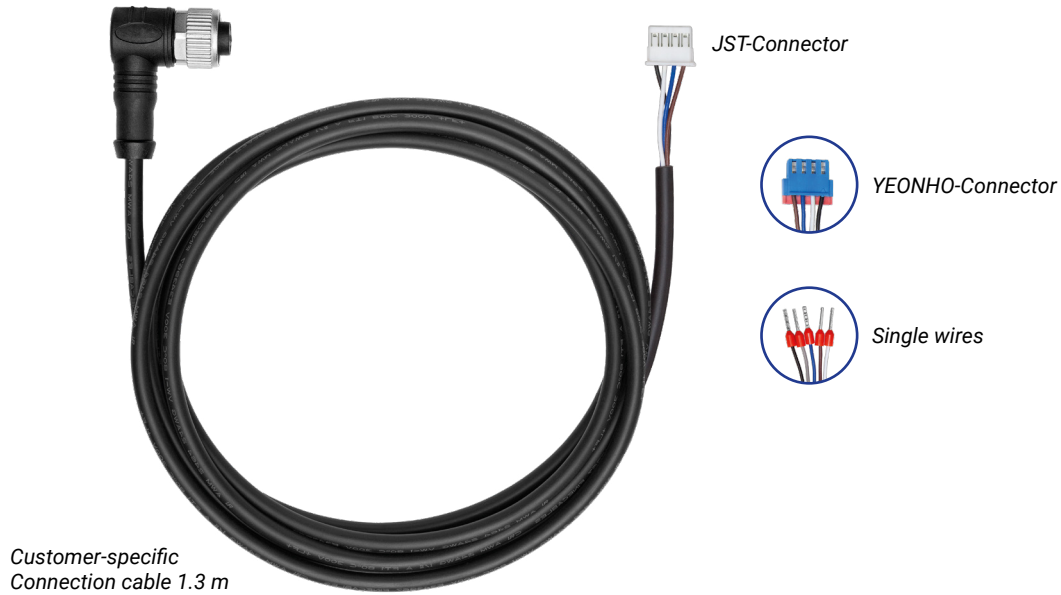


## Highlights

- Customised connection cables for our OEM customers
- Cable lengths and connector geometry are designed according to customer requirements
- A customer-specific article number is assigned


## To be defined by customer

- Cable length **[L]**
- Plug connector **[C]** consisting of
  - Connector housing  
(e.g. 1 x JST-Connector housing XAP-04v-1, natural (white))
  - Contact  
(e.g. 4 x JST-Contact SXA-001T0P0.6)
  - Pin assignment
- Number of wires

## Technical drawing

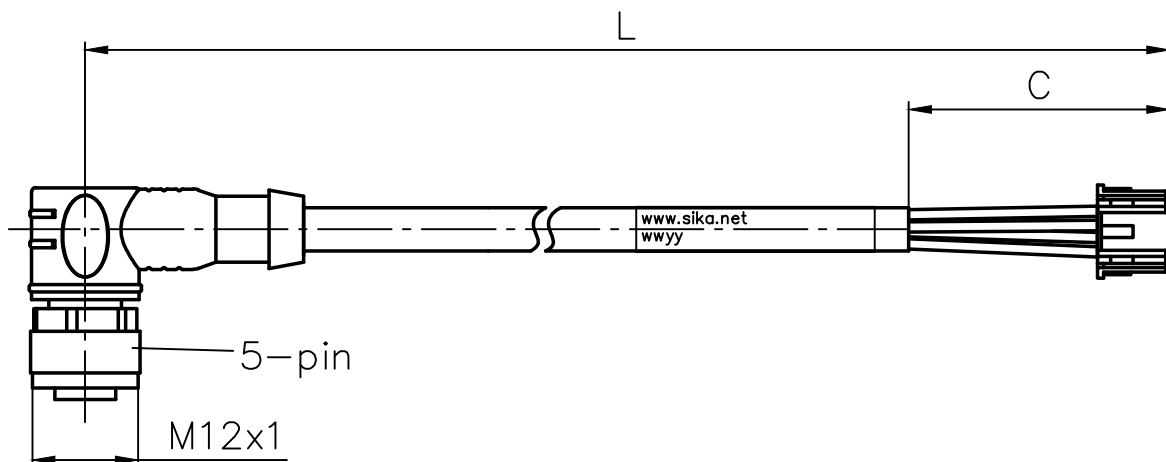

## Alternative: SIKA standard connection cables

Connection cable		Length [m]	Length [ft]	Order number
	Connection cable with 5 pin cable socket M12 x 1, angle type molded lead 5 x 0.34 mm <sup>2</sup> , sheathing material PVC, (T <sub>max</sub> = 80 °C / 176 °F), Pins: 1=brown, 2=white, 3=blue, 4=black, 5=grey, Customized plugs and cable lengths on request	1		XVWX493
		1.5		XVWX494
		2		XVWX482
		3		XVWX492
		5		XVWX481
		10		XVWX495
		UL approval	3	XVWX493UL
		UL approval	4.9	XVWX494UL
		UL approval	6.5	XVWX482UL
		UL approval	10	XVWX492UL
UL approval	16	XVWX481UL		
UL approval	33	XVWX495UL		